




The **Mini-Check (M1 - M8)** is designed for minimum pressure drop. The three-piece construction permits many combinations of end fittings, which makes the valve adaptable for nearly every application. The Mini-Check is available with 1/8, 1/4 and 3/8 inch pipe threads, both male and female. It can also be supplied with a 1/4 or 3/8 inch **tubing end** on one side and with a **pipe thread end** on the other. **Combinations** of male and female threads are also available. Consult the factory for more information.

- M1 – Male pipe threads both ends.
- M2 – Female pipe threads both ends.
- M3 – Male pipe **inlet** – female pipe **outlet**.
- M4 – Female pipe **inlet** – male pipe **outlet**.

- M5 – Male pipe **inlet** – tubing **outlet**.
- M6 – Female pipe **inlet** – tubing **outlet**.
- M7 – Tubing **inlet** – male pipe **outlet**.
- M8 – Tubing **inlet** – female pipe **outlet**.

NOTE: When ordering styles M5 through M8 be sure to specify tubing size and whether **compression or 37° flare**.

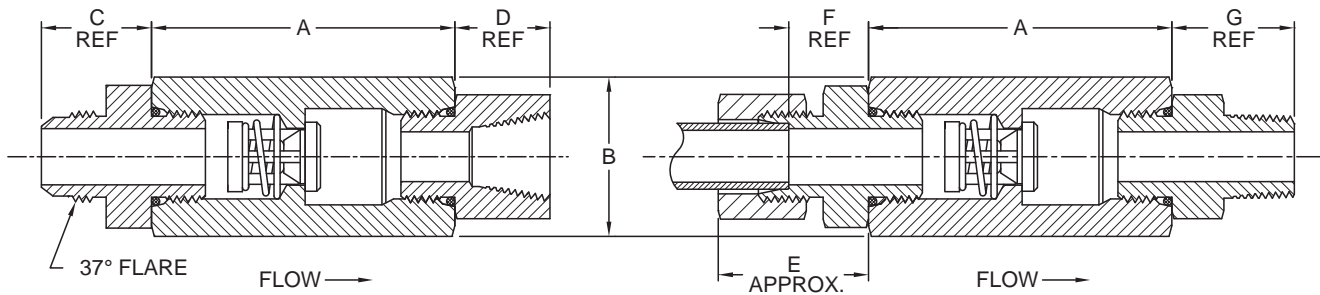

Nom. Pipe & Tube Size	Size Code	A	Hex Size B ^①	C	D	E	F	G	Orifice Diameter
1/8	A	2.16	7/8	N/A	0.71	N/A	N/A	0.71	0.348
1/4	B	2.16	7/8	0.89	0.84	1.23	0.57	0.95	0.348
3/8	C	2.48	1-1/8	0.94	0.91	1.32	0.59	1.00	0.464


^①May be larger and/or round.

Body Material ^②	Non-Shock Pressure-Temperature Rating ^③
316 Stainless Steel (SS)	5000 PSIG @ 100°F
Carbon Steel (CS)	
Brass (BR)	3000 PSIG @ 100°F

^②See page 53 for material grade information.

^③Maximum Pressure 1500 PSI for o-ring seats.

Mini Check
For Water at 72°F

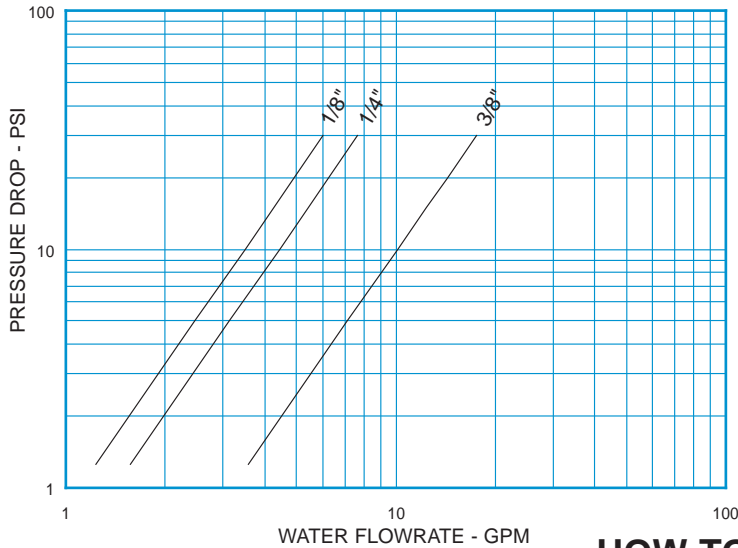


Note: All flow curves and Cv values presume the valves are fully open with 1/2 PSI cracking pressure springs. Consult the factory for more information.

STYLE M1-M8 (MCV) C _v VALUES & VALVE WEIGHTS		
C _v	SIZE	ALL MATL
1.1	1/8	6.2 oz.
1.4	1/4	7.3 oz.
3.2	3/8	11.8 oz.

See page 48 for Flow Formulae
Valve weights are approximate.

HOW TO ORDER
CHECK-ALL STYLE M1 - M8 (MCV)

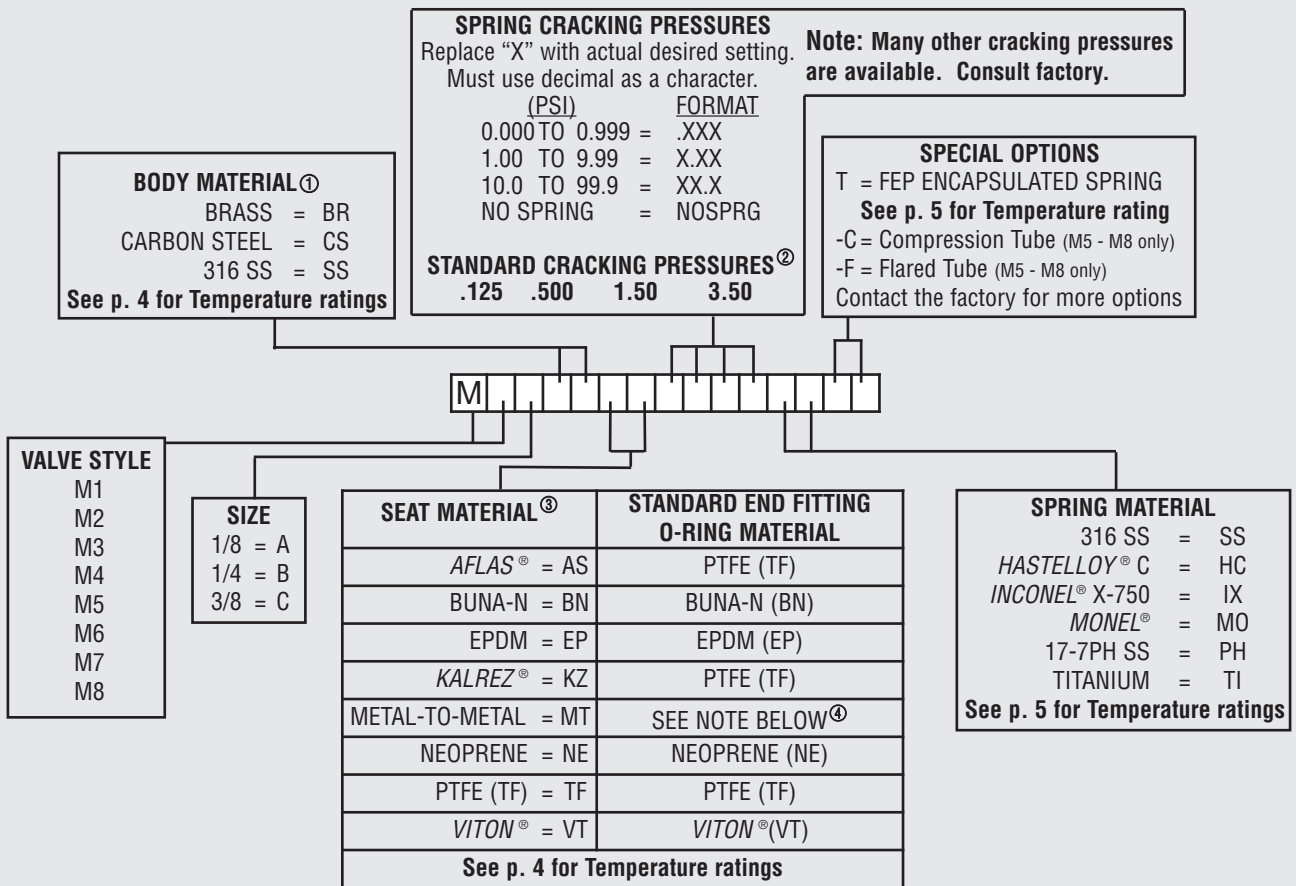

Listed above are the most common material selections. Please contact the factory for additional options.

- ① Brass valves have plated Carbon Steel tube fittings if applicable. Consult factory if other body or fitting materials are desired.
- ② .500 PSI is the only standard cracking pressure for spring materials other than Stainless Steel. Cracking pressure tolerance is +/- 15%. .125 PSI springs are not recommended for installations with flow vertical down.
- ③ Seat materials other than metal-to-metal have a maximum pressure rating of 1500 PSI. PTFE seats are not resilient. See page 49 for allowable leakage rates.
- ④ Brass and Carbon Steel valves have Buna-N end fitting o-rings, 316 SS valves have Viton[®] end fitting o-rings.