Series 26
Low Water Cutoff – Standoff Mount

- Meets CSD1 Requirements
- Non Powered Contacts
- Time Delays Available
- LED Monitoring
- Test Feature
- AC Current Minimizes Electrolysis
- Optional Dirty Electrode Detection
- Snap-Thru Standoff Mounting
- Compact Size
- Power Outage Feature
- U.L. "Limit Control"

Series 26 – General Purpose Control

Designed for boiler low-water cutoff protection. A snap-through standoff mounting device is available for Series 26 units. Optional Power Outage feature resets after nuisance outages. Optional reset button is used when device has been deactivated because of low water condition. Reset is functional only if water has returned to normal level. Built-in 3 second time delay is standard. Up to 90 seconds available for increasing and decreasing levels.

Specifications

Contact Design	1 N.O. & 1 N.C. (1 form C)
Contact Rating	10 amp Resistive 1/3 hp at 120, 240 VAC
Mode of Operation	Direct
Sensitivity	0-100K ohm, factory set
Primary Voltage	120 VAC, 240 VAC[1], 24 VAC, 208/240 VAC (+10%/-15%) 50/60 Hz
Secondary Voltage	12 VAC, 1.5 mA
Temperature	-40°F to +150°F (-40°C to +65°C)
Approvals[1]	U.L. 353, U.L. 508 File # MP1430
Terminal Style	Spade connection
Options	Time Delays, Power Outage, Retrofit Plate, Test Feature, Dirty Electrode Detection; See page E-11 for descriptions

Notes:
1. 240 VAC and 208/240 VAC are not U.L. recognized

How to Order

Use the **Bold** characters from the chart below to construct a product code.

26	X	X	X	X	X	XX	XX

1. Series
   26 General Purpose;
2. Sensitivity
   A 4.7K; **B** 10K; **C** 26K; **D** 50K; **E** 100K
3. Supply Voltage
   1 120 VAC; **2** 240 VAC; **3** 24 VAC; **8** 208/240 VAC
4. Standoff Style[1]
   A 1/16˝ Panel; **B** 1/8˝ Panel; **C** Screw mount; **D** Retrofit
5. Enclosure
   0 None; **1** NEMA 1; **4** NEMA 4
6. Option Package
   See page D-36, Chart B for code letter
7. Time Delay (decreasing level) Option
   03-90 seconds; **Blank** 3 seconds
8. Time Delay (increasing level) Option
   00-90 seconds; **Blank** 0 seconds

Socket Details and Option Availability are located on web site.

Applications

- Low-Water Cutoff
- Point Level
- Valve Control
- Single-Level Service
- Alarms
- Pump Control

Dimensions

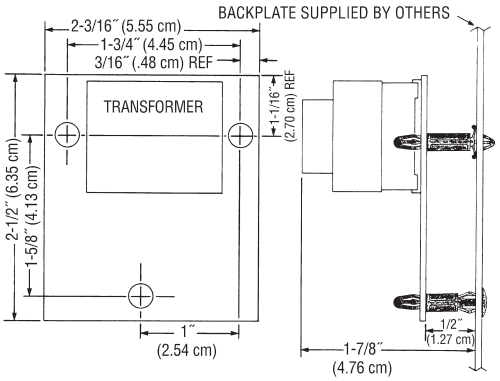
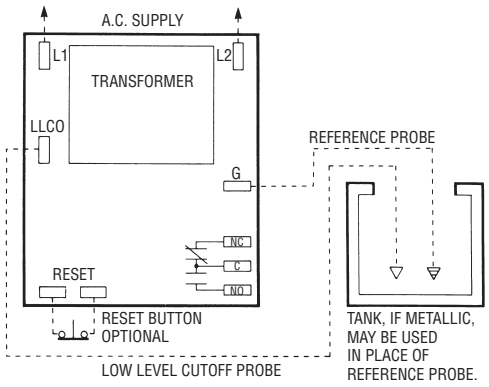
Wiring